




Malibu Ceiling Drum

- UL Listed for Damp Locations
- BAA Compliant
- Electronic Dimmable LED (120V Only)
- Ceiling or Pendant Mount
- Direct/Indirect Light
- Low Flicker 90 CRI Options

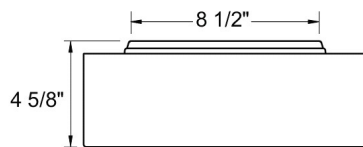

Shown With
Pendant Kit

6" or 13"
Lengths Available



Ordering Information

Example MCD-L-31W-N-WA-P-M

Item Series

M3030 **MCD** Malibu Ceiling Drum

Light Source

-L-14W 14 Watt LED 120V **-30K** 3000K, 80 CRI, 1430 Lumens OR **-40K** 4000K, 80 CRI, 1500 Lumens

-L-22W 22 Watt LED 120V **-30K** 3000K, 80 CRI, 1950 Lumens OR **-40K** 4000K, 80 CRI, 2130 Lumens

-L-32W 32 Watt LED 120V **-30K** 3000K, 80 CRI, 2700 Lumens OR **-40K** 4000K, 80 CRI, 2750 Lumens

-L-24W 24 Watt LED 120V **-30K** 3000K, 90 CRI, 1980 Lumens OR **-40K** 4000K, 90 CRI, 2020 Lumens

-L-31W 31 Watt LED 120V **-30K** 3000K, 90 CRI, 2750 Lumens OR **-40K** 4000K, 90 CRI, 2850 Lumens

MB Medium Base, Incandescent, Sockets Only, 2 X 40W Max

MBL Medium Base with LED Lamp **-30K** 3000K, 90 CRI LED Lamps **-40K** 4000K, 80 CRI LED Lamps

Body/Lens

Body **N** Brushed Nickel Lens **WA** White Acrylic

Options

P Pendant Kit 6"/13"

EM Emergency LED Array Board, Charger & Battery, Minimum 90 Minute, 4 Watt, Fixture Integrated, Test Button and Indicator Light

M Motion Sensor, Occupancy 120V Only